



DUNBAR-CHWT-FR

3:1 SHRINK RATIO, FLEXIBLE, SEMI-RIGID, HEAVY WALL, FLAME-RETARDANT, ADHESIVE-LINED POLYOLEFIN TUBING


Applications

DUNBAR-CHWT-FR is designed to provide reliable performance as well as excellent mechanical and environmental protection. DUNBAR-CHWT-FR is designed for sealing and insulation of cable splices, electrical connections, terminations, and jacket repairs. Ideally suited for shipboard, submersible, direct-buried installations, or wherever tougher mechanical protection is required in an electrical insulation system.

Features

- ★ Shrink ratio: 67% or more in the radial direction, 20% or less in the axial direction
- ★ In stock for immediate shipments
- ★ Operating temperature range: -55 °C (-67 °F) to 125 °C (230 °F)
- ★ Flammability: UL VW-1, CSA OFT
- ★ High Carbon Black composition to resist UV radiation
- ★ Exceptional flexibility prior to recovery

Standards

- ★  US UL 224: VW-1, 125 °C, 600 V (File Number E319303)
- ★ Declared Dimensional Life (DDL) – 10 Years
- ★ ABS File No. 02-SE23285-X
- ★ RoHS & REACH Compliant

Specification Values

Property		Test Method	Value	
Physical	Unaged	Tensile Strength	Min. 1200 psi	
		Elongation	Min. 200%	
	Aged	Tensile Strength	Min. 1000 psi	
		Elongation	Min. 100%	
	Fluid Resist.	Tensile Strength	24 °C/24 hrs	Min. 750 psi
		Dielectric Strength	6 Fluids	Min. 200 Volts/mil
	Low Temperature Flex	-55 °C x 4 hrs	No cracks	
Heat Shock	225 °C x 4 hrs	No cracks, flowing, or dripping		
Secant Modulus	ASTM D882	Max. 25,000 psi		
Electrical	Dielectric Strength	ASTM D2671	Min. 200 Volts/mil	
	Volume Resistivity	ASTM D876	Min. 10 ¹³ Ω · cm	
Chemical	Copper Corrosion	121 °C/16 hrs	No corrosion	
	Fungus Resistance	ASTM G21	No growth	
	Water Absorption	ASTM D570	Max. 0.5%	
	Flammability	ASTM D2671	Pass	

Rev. September 2024



Dunbar Products, LLC
Tubing and Identification Products




1302 Champion Circle, Carrollton, TX 75006
Tel: (469) 568-0800
Fax: (469) 568-0808



DUNBAR-CHWT-FR

3:1 SHRINK RATIO, FLEXIBLE, SEMI-RIGID, HEAVY WALL, FLAME-RETARDANT, ADHESIVE-LINED POLYOLEFIN TUBING

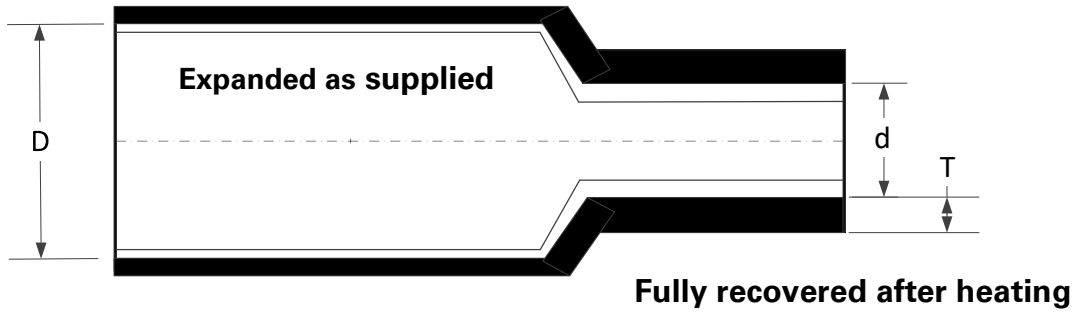

Product Dimensions

Minimum Shrink Temperature: 120 °C

Size	Expanded		Recovered			
	As Supplied ID* (Minimum) (D)		Internal Diameter (Maximum) (d)		Wall Thickness (Minimum) (T)	
In (mm)	in	mm	in	mm	in	mm
300 (7.6 mm)	0.300	7.6	0.100	2.5	0.035	0.9
400 (10.2 mm)	0.400	10.2	0.150	3.8	0.040	1.0
500 (12.7 mm)	0.500	12.7	0.170	4.3	0.040	1.0
750 (19.1 mm)	0.750	19.1	0.220	5.6	0.070	1.8
1100 (27.9 mm)	1.100	27.9	0.375	9.5	0.080	2.0
1300 (33.0 mm)	1.300	33.0	0.375	9.5	0.080	2.0
1500 (38.1 mm)	1.500	38.1	0.500	12.7	0.095	2.4
1700 (43.2 mm)	1.700	43.2	0.500	12.7	0.105	2.7
2000 (50.8 mm)	2.000	50.8	0.750	19.1	0.105	2.7
2700 (68.6 mm)	2.700	68.6	0.900	22.9	0.105	2.7
3000 (76.2 mm)	3.000	76.2	1.250	31.8	0.105	2.7
4000 (101.6 mm)	4.000	101.6	1.750	44.5	0.105	2.7
4500 (114.3 mm)	4.500	114.3	1.750	44.5	0.115	2.9
5100 (130 mm)	5.100	129.5	1.750	44.5	0.125	3.1

Rev. September 2024

*Supplied ID is for uncoated product. An allowance of approximately 0.050" may be necessary depending on coating.

Available Colors – Black & Red



Dunbar Products, LLC
Tubing and Identification Products



1302 Champion Circle, Carrollton, TX 75006
Tel: (469) 568-0800
Fax: (469) 568-0808